

NTK

INNOVATIVE THREAD WHIRLING

1
Single **PASS**

2
Double **LEAD SCREW**

3
Three **TIMES FASTER**

SWISS TOOLING SPECIALIST

App for iOS



App for ANDROID



WATCH ON



NTKCUTTINGTOOLS.com

youtube.com/NTKCUTTINGTOOLS

Thread Whirling

Features

WATCH ON
New Double-lead video is on [YouTube](#)



- NTK's unique patented design technology makes precise and correct inserts possible the first time, *without any redesign or remanufacturing even if it is a multiple-lead thread*
- The sharper cutting edges produce a better surface finish and longer tool life than competitor's inserts

Form Double-lead or Multiple-lead with Single Pass

Patented

	Double-lead threads	Triple-lead threads
Work	Bone screw	Worm gear
Work material	Ti-6Al-4V ELI	brass
Work appearance		
Insert appearance		
Major Dia.	$\phi .157$ "(4.0mm)	$\phi .278$ "(7.0mm)
Minor Dia.	$\phi .094$ "(2.4mm)	$\phi .185$ "(4.7mm)
Lead [Pitch×No. of Lead]	.135"(3.42mm) [.067"×2(1.71mm×2)]	.193"(4.9mm) [.064"×3(1.63mm×3)]

- Can reduce cycle time by more than half
- NTK can achieve what other competitors cannot

Double-lead Bone Screw Process Example

- 1 1st thread whirl at taper part
- 2 Rotate the bar 180° and whirl the 2nd thread on same part as **1**
- 3 Thread whirl whole straight part
- 4 Thread whirl at very last part to get two-exits, after back of bar has been backed up a half lead (one pitch) and rotated 180°

Special Item Capability

- Even though almost all bone screw shapes are special, NTK thread whirling inserts can make the correct shape of thread the first time, without any redesign or remanufacturing
- Inserts will be delivered in 5 weeks after the order is received
- Within a 3 week time period, expedite delivery is available with an expedite fee
- Basically NTK thread whirling inserts are ground with topping and coated

Recommended Cutting Conditions

No. of teeth		9	6	4	
Conditions					
Main spindle	RPM	10 - 40	10 - 25	7 - 15	Faster RPM reduces machining time
	F	5400 - 14400	3600 - 9000	2500 - 5400	
Whirling cutter	RPM	1500 - 4000			
Feed Rate		Same as thread-lead			
Bar stock	φ	~φ .400" *		~φ .200"	* For cutter with φ 12mm ID
Work Material		Ti-6Al-4V ELI / 316SS / Titanium			


- Formula for calculating thread whirling process time

$$T \text{ (Seconds)} = \frac{60 \times \text{Thread length}}{\text{Main spindle rpm} \times \text{Feed rate (Thread lead)}}$$


Ex.) Double lead / 2" length / .100" lead (2×.050" pitch) / 30 rpm

$$T \text{ (Seconds)} = \frac{60 \times 2}{30 \times .100"} = 40 \text{ Seconds}$$



Applicable Thread Geometry (Approximated)

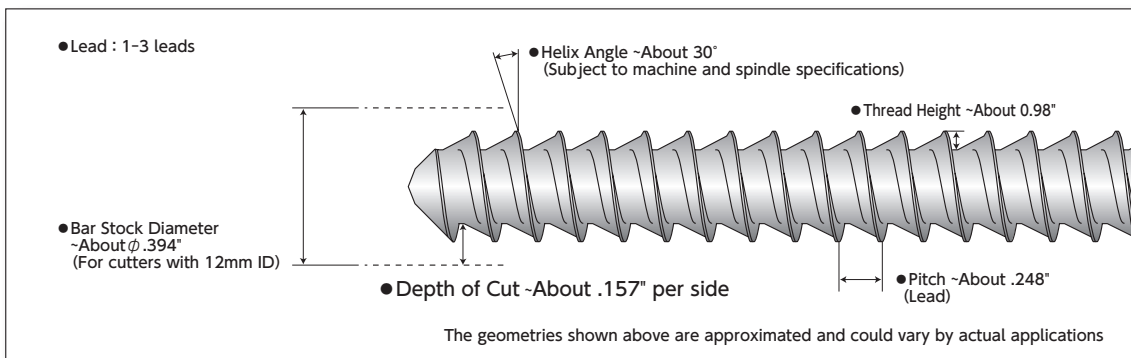



Thread Whirling System




Type 1







Type 2
Quick-change



Type 3
Quick-change



Machine make	Model	Location	Spindle make	Spindle model	Helix angle	NTK Thread whirling system	Stock	No. of tooth	ϕD_m (mm)	Type	ϕD_s	P.C.D.	Mount adapter bolt											
CITIZEN	M ₃₂ -VIII	Gang	CITIZEN	BTW-4000	0° - 15°	TWC9C0746HP1	●	9	$\phi 12$	1	$\phi 46$	$\phi 35$	M3											
	L20/L20E/L20X	Gang		BTW-3000 BTW-3100	0° - 15°																			
	L32/L32X	Gang		BTW-3100	0° - 15°																			
	L32X			BTW-6000	$\pm 25^\circ$																			
	L20X				$\pm 25^\circ$																			
	M16			BTW-2000	0° - 15°																			
	A20				$\pm 25^\circ$																			
	A32													$\pm 25^\circ$										
	L20/L20X				BTW-1000										$\pm 25^\circ$									
	L32/L32X															$\pm 25^\circ$								
	M20				$\pm 25^\circ$																			
	M32														$\pm 25^\circ$									
	C32	$\pm 25^\circ$																						
	L20		$\pm 25^\circ$																					
	M20	$\pm 25^\circ$																						
	M ₃₂		$\pm 25^\circ$																					
	C12/16	Gang		LTR0170	$\pm 15^\circ$	TWC9C1037P2	●	9	$\phi 12$	2	$\phi 37$	$\phi 30.5$	CS0310(M3)											
	M12/16	Turret	LTR0128/LTR0168																					
	M12/16III		MSW105																					
	M20/32III		KSW110																					
L20	Gang	LTR0183	$\pm 15^\circ$	TWC9J1040P2	●	9	$\phi 12$	2	$\phi 40$	$\phi 32.5$	H-M4 × 12													
M20/32		LTR0169																						
M20/32		Turret																						
K16	Attachment	PCM	GSW-101	$\pm 15^\circ$	TWC6P1620HP1-D9	●	6	$\phi 9$	1	$\phi 32$	$\phi 26$	M4 (Provided with spindle)												
L20	Gang		LSW-101-L20	$\pm 10^\circ$	TWC9P1340P2	●	9	$\phi 12$	2	$\phi 40$	$\phi 32.5$	M4 (Provided with spindle)												
M12/16	Turret												MSW-101											
M20/M32													KSW-101											
STAR	ECAS-12/20	Attachment	STAR	54178	$\pm 10^\circ$	TWC9S1640P2	●	9	$\phi 12$	3	$\phi 40$	$\phi 33$	CS04148S(M4)											
	SB-20R			OM171	-20° - 0°																			
	SR-20J/20RIII/20RIV			54172	-20° - 0°																			
	ECAS-20T	59172																						
	ECAS-32T	Turret		58171	$\pm 20^\circ$																			
	SR-38			10172	$\pm 10^\circ$																			
	ST-38			43156	$\pm 20^\circ$																			
	SV-12			45172	$\pm 10^\circ$																			
	SV-20/SV-20R			42173	$\pm 10^\circ$																			
	SV-32			43172	$\pm 10^\circ$																			
	SV-38R			43156	$\pm 20^\circ$																			
	TSUGAMI			BH20/BH38	Turret									TSUGAMI	3263-Y481	$\pm 10^\circ$	TWC9TS2252P2	●	9	$\phi 12$	3	$\phi 52$	$\phi 42$	CS0515(M5)
				BS20	Attachment										3214-Y1371	$\pm 10^\circ$	TWC9TS20550P2	●	9	$\phi 16$	3	$\phi 50$	$\phi 40$	CS0515(M5)
SS20/SS26/SS32 B0265/B0266-II B0325/B0326-II			Attachment	3268-Y450 3268-Y451	0° - 10°	TWC9TS2244HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0520(M5)											
S205/S206		3281-Y450 3281-Y451		0° - 20°	TWC9TS1944HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0520(M5)												
B0123/B0124/B0125/ B0126-II/III		3220-Y6540 3220-Y6541		0° - 25°	TWC9TS1644HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0515(M5)												
B0203/B0204/B0205/ B0205/B0206-II/III				0° - 30°	TWC9TS1044HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0515(M5)												
SS20/SS26/SS32		3268-Y271		0° - 10°	TWC9TS1952P2BK	●	9	$\phi 12$	4	$\phi 52$	$\phi 38$	CS0515(M5)												
				0° - 20°	TWC9TS1652P2BK	●	9	$\phi 12$	4	$\phi 52$	$\phi 38$	CS0515(M5)												
SS207/SS267/SS327		-		Using B-axis	0° - 15°	TWC4TS3010HP1	●	4	$\phi 7$	5	$\phi 10$	For single-corner inserts only												

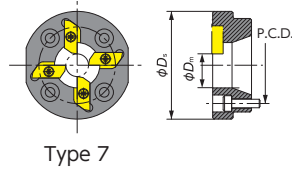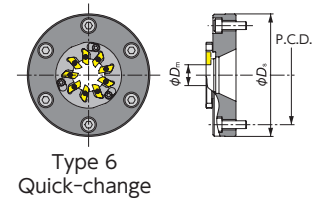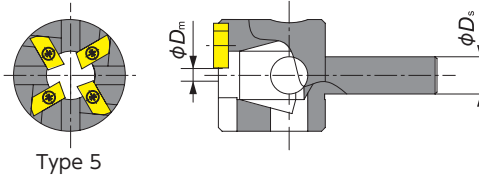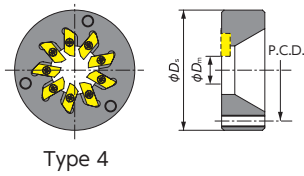

Machine make	Model	Location	Spindle make	Spindle model	Helix angle	NTK Thread whirling system	Stock	No. of tooth	ϕD_m (mm)	Type	ϕD_s	P.C.D.	Mount adapter bolt
TORNOS	DECO 10/10a	Attachment	TORNOS	224-1900	$\pm 15^\circ$	TWC6TO11542HP1	●	6	$\phi 12$	4	$\phi 42$	$\phi 32$	CS0410(M4)
	Evo DECO 10/10			242-1900									
	DECO 13a/13e			226-1900	$\pm 15^\circ$	TWC9TO10540P2	●	9	$\phi 12$	3	$\phi 40$	$\phi 31$	CS0410(M4)
	Evo DECO 16/10			243-1900									
	Swiss ST26			246-1900									
	DECO 20a			223-1900									
	DECO 26a			225-1900	$\pm 25^\circ$	TWC9TO12050P2-D18	●	9	$\phi 18$	3	$\phi 50$	$\phi 40$	CS0410(M4)
	Sigma 20			234-2750									
Sigma 32	236-2750												
HASEGAWA	JS-1W	—	HASEGAWA	—	$0^\circ - 20^\circ$	TWC9HA22594P2	●	9	$\phi 16$	6	$\phi 94$	$\phi 76$	CS0620(M6)

■ Spare Insert Holder (Cartridge)

Item number	No. of tooth	ϕD_m (mm)	Compatible cutters
TWC6HP2	6	12	For Type 2 and Type 3*
TWC9HP2	9	12	For Type 2 and Type 3*
TWC9HP2-D16	9	12	For Type 6

Note: Insert holder comes with insert screws and wrench
Insert holder mounting screw is not included


*Cannot be used for TWC9TS20550P2, TWC9TO12050P2-D18 and TWC9HA22594P2

■ Spare Parts

Description		Item number
Insert Screw	For 4mm thick inserts	FSI17-2.2×6.0
	For 6.5mm thick inserts	FSI24-2.2×7.9
Wrench		T-07
Insert Holder Mounting Bolt		CS0309-TW

NTK's Unique Attachment System

NTK's whirling insert holder can be attached and detached without removing mounting screws

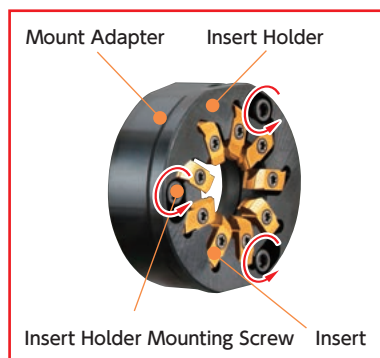

① Loosen the Mounting Screws



② Rotate the Insert Holder 10 degrees




③ Detach the Insert Holder without removing the Mounting Screws

● : Stock

○ : 1-2 week delivery

Basic Insert Grade


ZM3



- ZM3 is our basic grade for NTK thread whirling
- ZM3 offers excellent surface finish
- NTK can make inserts with other coatings to meet customers demands


NTK Experiences and Solutions Example

For absolute flat on OD

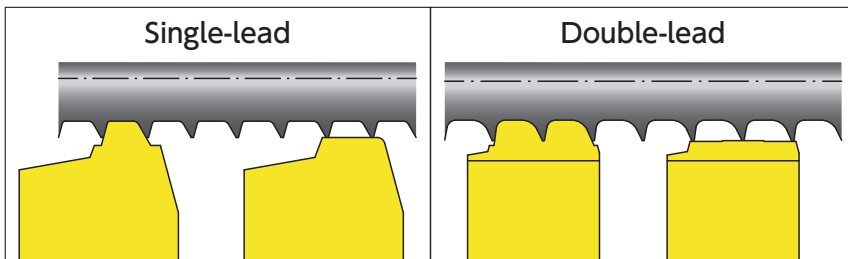

- Two insert combination brings absolute flat on OD to meet the drawing


For tiny thread

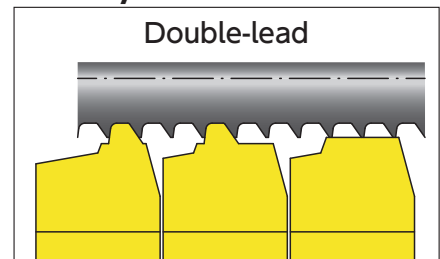


- NTK's Thread Whirling system can machine small diameter multi-lead screws to spec, with lower tool pressure, by using several types of specially designed and accurately ground inserts on the cutter.

Standard Thread Whirling Inserts (two-sided) for ISO Style Threads


(Note: Must use Thread whirling cutters with 12mm ϕ Dm dimension. See page U18-19 to find ϕ Dm for each cutter.)

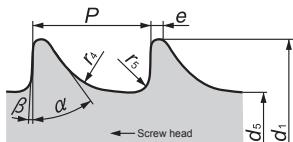


ISO5835 HA

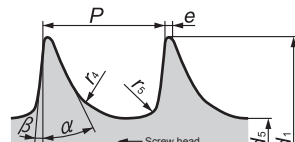

ISO5835 HB

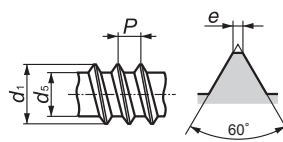

ISO9268 HC

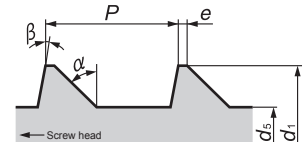


ISO9268 HD


Item number	ISO Standard	d_1	d_5	P	e	r_4	r_5	α	β	Metric dimensions		
										Supposition material Dia.	Coated Carbide ZM3	
TW5835-HA1.5-D12	ISO5835	HA1.5	1.5 ⁰ _{0.15}	1.1 ⁰ _{0.1}	0.5	0.1	0.3	0.1	35°	3°	ϕ 8	○
TW5835-HA2.0-D12		HA2.0	2.0 ⁰ _{0.15}	1.3 ⁰ _{0.1}	0.6	0.1	0.4	0.1	35°	3°		○
TW5835-HA2.7-D12		HA2.7	2.7 ⁰ _{0.15}	1.9 ⁰ _{0.15}	1	0.1	0.6	0.2	35°	3°		○
TW5835-HA3.5-D12		HA3.5	3.5 ⁰ _{0.15}	2.4 ⁰ _{0.15}	1.25	0.1	0.8	0.2	35°	3°		○
TW5835-HA4.0-D12		HA4.0	4.0 ⁰ _{0.15}	2.9 ⁰ _{0.15}	1.5	0.1	0.8	0.2	35°	3°		○
TW5835-HA4.5-D12		HA4.5	4.5 ⁰ _{0.15}	3.0 ⁰ _{0.15}	1.75	0.1	1	0.3	35°	3°		○
TW5835-HA5.0-D12		HA5.0	5.0 ⁰ _{0.15}	3.5 ⁰ _{0.15}	1.75	0.1	1	0.3	35°	3°		ϕ 10
TW5835-HB4.0-D12	ISO5835	HB4.0	4.0 ⁰ _{0.15}	1.9 ⁰ _{0.15}	1.75	0.1	0.8	0.3	25°	5°	ϕ 8	○
TW5835-HB6.5-D12		HB6.5	6.5 ⁰ _{0.15}	3.0 ⁰ _{0.15}	2.75	0.2	1.2	0.8	25°	5°	ϕ 10	○
TW9268-HC2.9-D12	ISO9268	HC2.9	2.79 to 2.9	2.03 to 2.18	1.06	0.1max	—	—	—	—	ϕ 8	○
TW9268-HC3.5-D12		HC3.5	3.43 to 3.53	2.51 to 2.64	1.27	0.1max	—	—	—	—		○
TW9268-HC3.9-D12		HC3.9	3.78 to 3.91	2.77 to 2.92	1.27	0.1max	—	—	—	—		○
TW9268-HC4.2-D12		HC4.2	4.09 to 4.22	2.95 to 3.25	1.27	0.1max	—	—	—	—		○
TW9268-HD4.0-D12		HD4.0	4.0±0.03	2.92±0.03	1.59	0.1	—	—	45°	10°		○
TW9268-HD4.5-D12		HD4.5	4.5±0.03	2.92±0.03	2.18	0.1	—	—	45°	10°		○

● : Stock


○ : 1-2 week delivery


Application Examples

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ.375	Number of start	2
Major Dia.	φ.157	Helix Angle	28.5°
Minor Dia.	φ.098	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	15	Speed of whirling cutter (rpm)	3,500
Lead = Feed (IPR)	.217	Result	OK
NTK Thread Whirling	Dramatically improved productivity		
Competitor's Thread Whirling		<i>Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.</i>	
NTK thread whirling succeeded in double lead screw machining when one of the major thread whirling suppliers has failed many times.			

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ.250	Number of start	2
Major Dia.	φ.118	Helix Angle	15.4°
Minor Dia.	φ.083	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	11	Speed of whirling cutter (rpm)	2,200
Lead = Feed (IPR)	.087	Result	OK
NTK Thread Whirling	Dramatically improved productivity		
Competitor's Thread Whirling		<i>Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.</i>	
Customer was concerned with stock rigidity and long cycle time. NTK applied three geometry inserts to achieve single pass machining, in dramatically short time. The up-sharp cutting edges and low cutting pressure produced "excellent" surface finish.			

Single-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ.197	Number of start	1
Major Dia.	φ.091	Helix Angle	5.3°
Minor Dia.	φ.067	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	30	Speed of whirling cutter (rpm)	3,100
Pitch = Feed (IPR)	.023	Result	OK
NTK Thread Whirling	2200 pcs		
This thread is up to 1.26" length with a small pitch. Cycle time could be increased with a single-point threading tool. NTK's inserts, designed for lower tool pressure, ran 2,200 pcs/corner at 30 rpm of bar stock (F10,800). It only took 110 seconds to finish a 1.26" length thread.			

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ.350	Number of start	2
Major Dia.	φ.180	Helix Angle	23.0°
Minor Dia.	φ.120	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	12	Speed of whirling cutter (rpm)	2,500
Lead = Feed (IPR)	.200	Result	OK
NTK Thread Whirling	Dramatically improved productivity		
Competitor's Thread Whirling		<i>Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.</i>	
The customer could not get perfect double lead thread form in single pass from other manufacturers. NTK got perfect thread form with a single pass on first trial saving cycle time.			

Single-lead Bone Screw			
Work Material : 316SS			
Bar Stock Dia.	φ.315	Number of start	1
Major Dia.	φ.138	Helix Angle	7.5°
Minor Dia.	φ.098	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	23	Speed of whirling cutter (rpm)	2,000
Pitch = Feed (IPR)	.049	Result	OK
NTK Thread Whirling	2600 pcs		
Competitor's Thread Whirling		1000 pcs	
Some thread whirling manufacturers offer 6-teeth or 12-teeth systems, too many teeth cause chip packing issues and more tool pressure. Fewer teeth means greater cycle time. NTK concluded that 9-teeth is the best configuration. Our customers can run 1.5 times faster and get longer tool life.			

Triple-lead Worm Gear			
Work Material : Brass			
Bar Stock Dia.	φ.315	Number of start	3
Major Dia.	φ.276	Helix Angle	14.6°
Minor Dia.	φ.185	Hand of thread	Left
Cutting condition			
Main Spindle Speed (rpm)	20	Speed of whirling cutter (rpm)	3,500
Lead = Feed (IPR)	.189	Result	OK
Multi-lead threads, common in the Worm Gear industry are made by a forming or cutting process. The large helix angle is difficult to machine with single-point threading. NTK now makes thread whirling inserts for multi-lead threads. Cycle time is reduced with a one pass process and thread form dimensions are stable with the low tool pressure.			



Double lead Screw in single pass video is on YouTube

North and South America



NTK CUTTING TOOLS USA
a division of NGK SPARK PLUGS (U.S.A), INC.



46929 Magellan Drive,
Wixom, MI 48393, U.S.A.
Tel.; +1-248-668-0100
Fax; +1-248-668-0200
www.ntkcuttingtools.com



NTK CUTTING TOOLS MEXICO
a division of Bujías NGK de México, S.A. DE C.V.



Carretera Lago de Guadalupe,
Km. 27.5, S/N, Bodega 3-A,
Col. San Pedro Barrientos,
Tlalneantla, Estado de
México, C.P. 54010
Tel.; +52-55-5317-5872
Fax; +52-55-5317-5876
www.ntkcuttingtools.com/mx/



NTK CUTTING TOOLS BRAZIL
a division of NGK DO BRASIL LTDA.



Rodovia Professor Alfredo
Rolim de Moura(SP-88),
km.61, s/n, Bairro Cocuera,
Caixa Postal 2540,
CEP 08780-970,
Mogi das Cruzes-SP, Brasil
Tel.; +55-11-4793-8265
Fax; +55-11-4793-8270
www.ntkcuttingtools.com/br/



JAPAN / Head office



NTK CUTTING TOOLS JAPAN
a division of NGK SPARK PLUG CO.,LTD.



2808,Iwasaki, Komaki,
Aichi
485-8510, Japan
Tel.; +81-568-76-1538
Fax; +81-568-76-1288
www.ntkcuttingtools.com/jp/

EUROPE



NTK CUTTING TOOLS EUROPE
a division of NGK SPARK PLUG EUROPE GmbH



Harkortstr41, 40880
Ratingen, Germany
Tel.; +49 2102 974-350
Fax; +49 2102 974-399
www.ntk-cutting-tools.com



NTK CUTTING TOOLS UK
a division of NGK SPARK PLUGS (U.K), LTD.




Maylands Avenue,
Hemel Hempstead Herts.
HP2 4SD, U.K.
Tel.; +44 1442-281-000
Fax; +44 1442-281-080
www.ntkcuttingtools.co.uk

ASIA



NTK CUTTING TOOLS THAILAND
a division of NGK SPARK PLUGS (THAILAND) CO.,LTD.



700/864 Moo1,
Panthong sub-district,
Panthong District,
Chonburi 20160,
Thailand
Tel.; +66-38-185-306
Fax; +66-38-185-316



NTK CUTTING TOOLS INDONESIA
a division of P.T. NGK Busi Indonesia



Jl. Raya
Jakarta-Bogor,
Km 26, 6 Ciracas,
Pasar Rebo,
Jakarta Timur,
Indonesia
Tel. ; +62-21-8710974
Fax ; +62-21-8710965



NTK CUTTING TOOLS CHINA
a division of NGK Spark Plug (Shanghai) Co., Ltd.



No.736
Songsheng Road
Songjiang Industrial Zone,
Shanghai 201613, The People's
Republic of China
Tel.; +86-21-63857652
Fax; +86-21-63853690
www.ntkcuttingtools.com/cn/



NTK CUTTING TOOLS KOREA
a division of NTK TECHNICAL CERAMICS KOREA CO.,LTD.



680-14 Kojan-Dong,
Namdong-ku Incheon,
Korea
Tel.; +82-32-815-6763
Fax; +82-32-815-6762
www.kntktool.co.kr



NGK SPARK PLUGS (USA), INC.

NTK Cutting Tools USA

a division of NGK SPARK PLUGS (U.S.A), INC.
46929 Magellan Drive, Wixom, MI 48393, U.S.A.
Toll Free: 866-900-9800
ctinfo@ntktech.com

www.ntkcuttingtools.com



DISTRIBUTED BY

